




LIGHTNING[®]

FENCING PRODUCTS


FENCE STRENGTH FOR THE LONG RUN

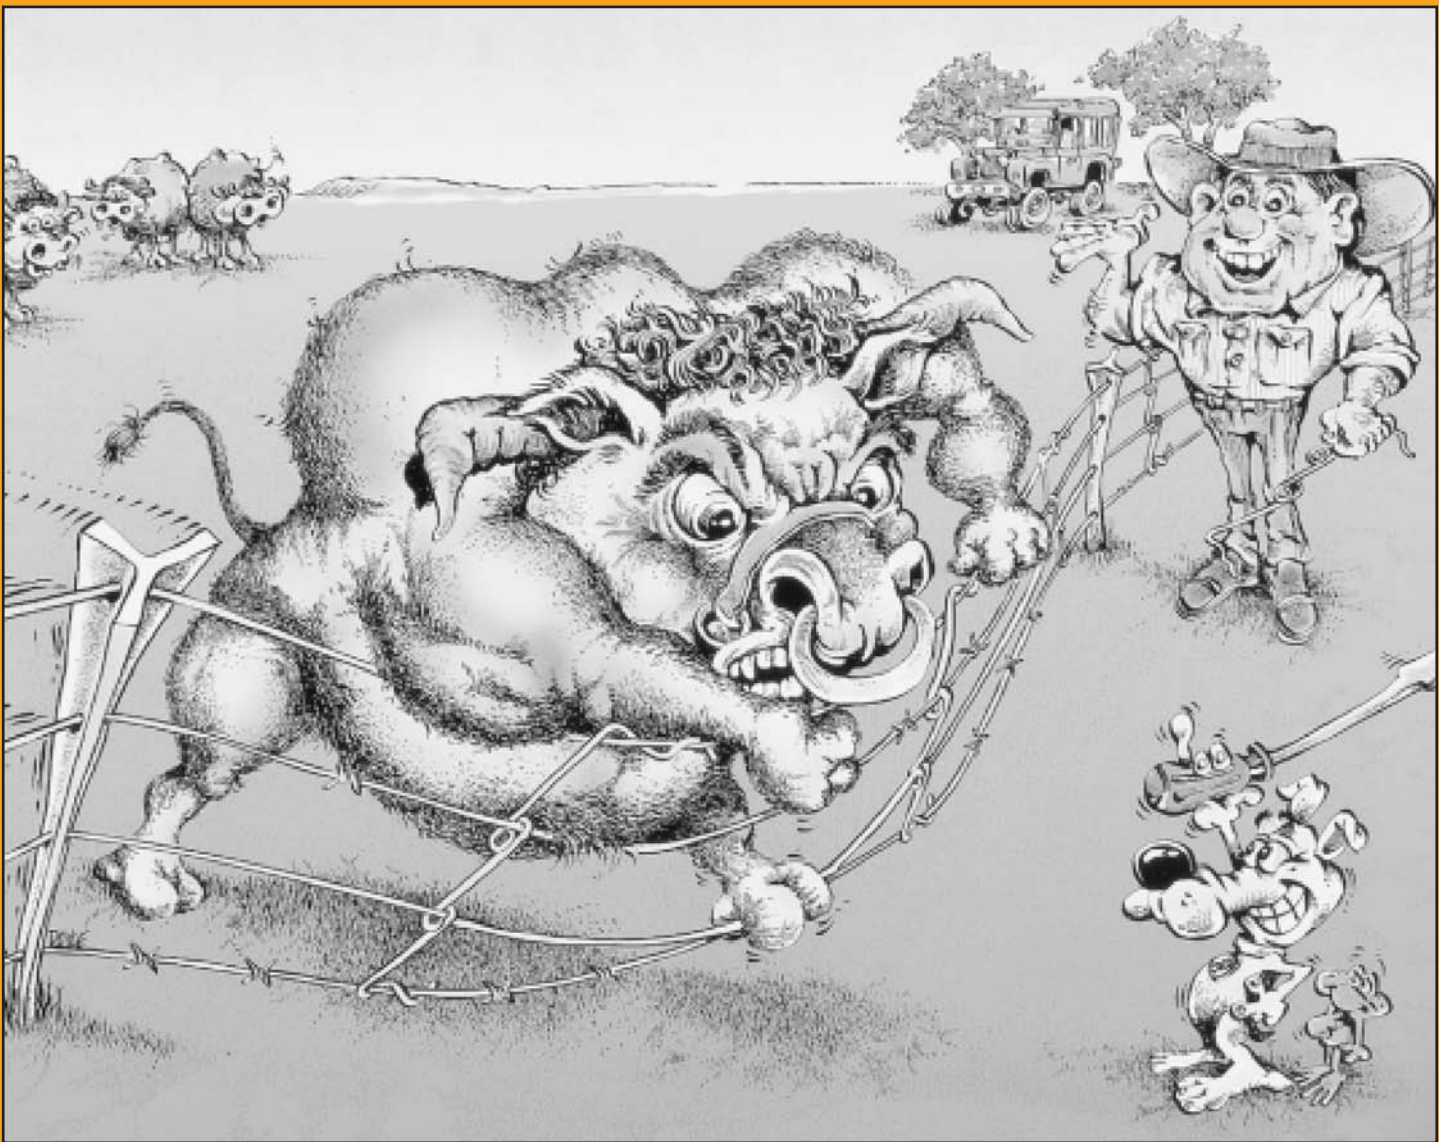

Fence Droppers/Spacers and Offsets

FENCE STRENGTH FOR THE LONG RUN

You can slip a Lightning Fence Dropper in place in seconds with a flick of the wrist and a screwdriver. Then you can forget it for years.

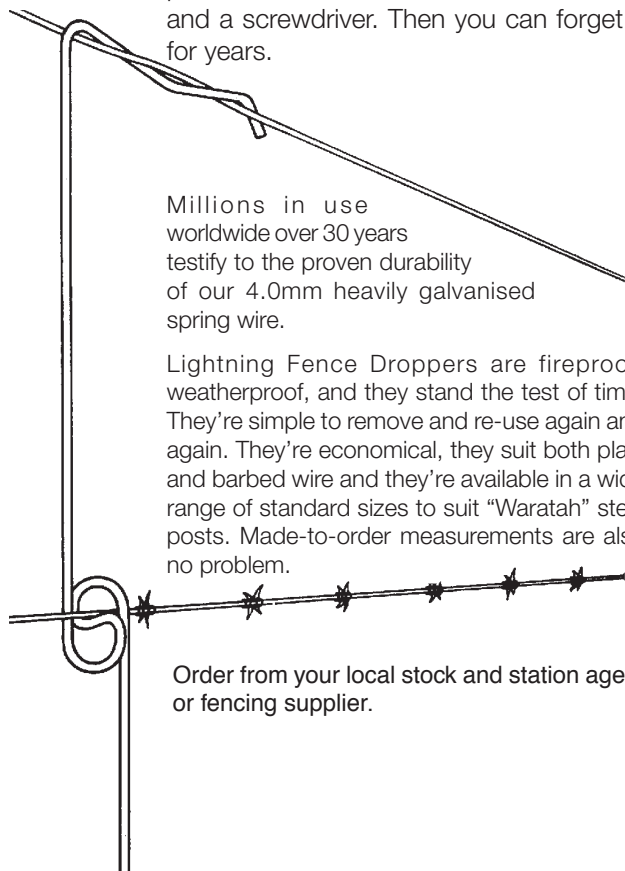

Millions in use worldwide over 30 years testify to the proven durability of our 4.0mm heavily galvanised spring wire.

Lightning Fence Droppers are fireproof, weatherproof, and they stand the test of time. They're simple to remove and re-use again and again. They're economical, they suit both plain and barbed wire and they're available in a wide range of standard sizes to suit "Waratah" steel posts. Made-to-order measurements are also no problem.

Order from your local stock and station agent or fencing supplier.

Simple Economical Design

Add years to the serviceable life of your fencing and save money and stock. Lightning Fence Droppers are lightweight for maximum fence efficiency and minimum freight costs. They are easily removeable, re-usable and fire resistant, require no maintenance and suit plain or barbed wire.

Heavily Galvanised for Added Durability

Heavily galvanised 4.0mm spring wire makes Lightning Fence Droppers flexible and resistant to time and the weather. They keep on springing back into place, and will not stay bent or break.

Proven Quality and Performance

Lightning Fence Droppers are Australian-made by an Australian-owned company, using highest quality springwire... with a track record a country mile long.

Complete Range of Sizes

Standard sizes suit a range of 3 to 9 lines. **Custom sized droppers are our speciality.** Droppers can be supplied with overall lengths up to 120cm for any number of line wires with a minimum spacing between wires of 7.5cm*. When ordering please specify clearly, spacings of line wires starting from the bottom wire, or order standard sizes by colour code. Please ask for our supplementary list for a more comprehensive range of common sizes. Standard sizes are:


Ordering Code	Overall Length	*Spacings from Bottom in cms	No. of Line Wires	Colour Code	^Weight per Bundle (x25 droppers)
FD360	60cm	30-30	3	Yellow	2.5kg
FD361	61cm	28-33	3	Red	2.5kg
FD476	76cm	27-26-23	4	Brown	3.2kg
FD478	78cm	26-26-26	4	Black	3.2kg
FD490	90cm	30-30-30	4	Lt. Brown	3.5kg
FD491	91cm	30-28-33	4	White	3.6kg
FD576	76cm	15-18-20-23	5	Burgundy	3.4kg
FD691	91cm	15-15-18-20-23	6	Olive	4.0kg
FD693	93cm	15-15-18-20-25	6	Gold	4.0kg
FD7104	104cm	13-15-15-18-20-23	7	Orange	4.5kg
FD7106	106cm	13-15-15-18-20-25	7	Lt. Green	4.5kg
FD8100	100cm	13-13-13-13-15-15-18	8	Pink	4.6kg
FD8107	107cm	13.5-15-15-12-16-20-15.5	8	Green	4.8kg
FD8114	114cm	10-13-15-15-18-20-23	8	Violet	5.0kg
FD996	96cm	10-10-10-10-13-13-15-15	9	Lt. Blue	4.9kg

*measured to nearest 0.5cm. ^Droppers are sold by quantity not weight.


Insulated Offsets Available to Suit Electric Fencing

Call us for information about insulated offsets for electric fences.


So Quick and Easy to Apply



STEP 1
Hold dropper against the fence, with loops parallel to the fence and engage wires with downward movement.



STEP 2
Rotate dropper anti-clockwise to lock wires in the loops.



STEP 3
Wind tails onto top and bottom wires with screwdriver or rod. To remove and reuse Lightning Fence Droppers, reverse steps 1 to 3



HEAD OFFICE: Hi Tensile Pty Ltd A.B.N. 41 604 199 491
45 Holland Street, Northgate Qld 4013 • PO Box 77, Northgate 4013
Toll Free Phone 1800 177 615 • Toll Free Fax 1800 639 029
www.fencedropper.com

Hi Tensile Pty Ltd accepts no responsibility for personal injury or property damage that may arise from the use of our products.